




KORTON INDUSTRIAL LIMITED

67390/67322 NSK CYLINDRICAL ROLLER BEARING

Bearing No. 67390/67322

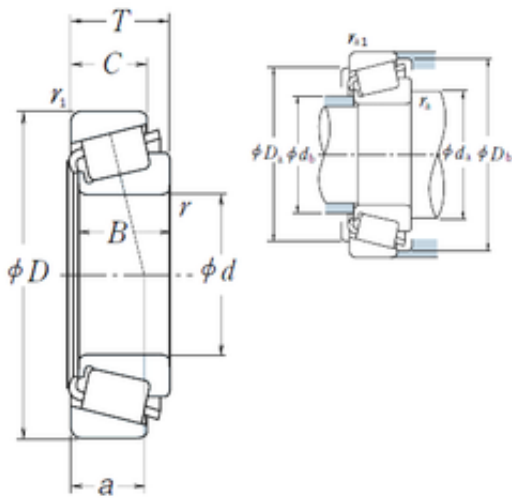

67390/67322 Bearing 2D drawings and 3D CAD models

Size	133.35x196.85x46.038 mm
Bore Diameter	133,35 mm
Outer Diameter	196,85 mm
Width	46,038 mm
d	133,35 mm
D	196,85 mm
T	46,038 mm
B	46,038 mm
C	38,1 mm
ra1 max.	3,3 mm
a	39,7 mm
r min.	3,5 mm
r1 min.	3,3 mm
Da	180 mm
db	143 mm
ra max.	3,5 mm
da	149 mm
Db	189 mm
Weight	4,73 Kg
Basic dynamic load rating (C)	315 kN
Basic static load rating (C0)	560 kN
(Grease) Lubrication Speed	1700 r/min
(Oil) Lubrication Speed	2200 r/min
Calculation factor (e)	0,34
Calculation factor (Y0)	0,96



KORTON INDUSTRIAL LIMITED

LangID	1
ALP23	0
outer r	3.3
ALP22	50
D_	196.85
ALP21	25
SHOG_yobi	67390/67322
RAr	419.101
inner r	3.5
GRS rpm	1700
D_b	189
D_a	180
DE_	180.068
SLR	33
Prod_Type3	TRBSR_ID_A
BETA_	1
ALPHA_	12.917
SDM_	165.201
DA1	15.847
DA2	14.602
hidYobi	67390/67322
Y1	1.7
B_	46.038
Oil rpm	2200
hidTable	ecat_NSTPRI
Y0	0.96
inner ra	3.5
outer rb	3.3
C0	560
CUP	1.46
e	0.34
DA_	15.234



KORTON INDUSTRIAL LIMITED

BET21	2
BET22	10
BET23	0
Z_	29
C_	38.1
yobi	67390/67322
KBRG	3161
CONE	3.27
DI_	150.155